

WRB2405S-3W-7892-8768K

18-36V Input, 5V Output 3W Isolated Power Supply

1. Description

WRB2405S-3W-7892-8768K is isolated 3W DC-DC converter module with a wide 2:1 input voltage range (18-36V), and a regulated output of 5V. The product has a relatively compact open-frame SIP-7 package. The power module features high efficiency, operating ambient temperature of -40°C to $+85^{\circ}\text{C}$, remote control, and continuous short-circuit protection. The smaller size and cost-effective design make the module an ideal solution in communication, instruments, and industrial electronics applications.

VIN (V)	VOUT (V)	PO (W)	Isolation voltage (kV)	Peak Efficiency (%)
18-36	5	3	1.5	79

1.1. Functional Block Diagram

WRB2405S-3W-7892-8768K module employs an isolated flyback architecture with primary-side regulation. The system primarily comprises a flyback controller IC, a transformer, input and output capacitors, and associated peripheral components.

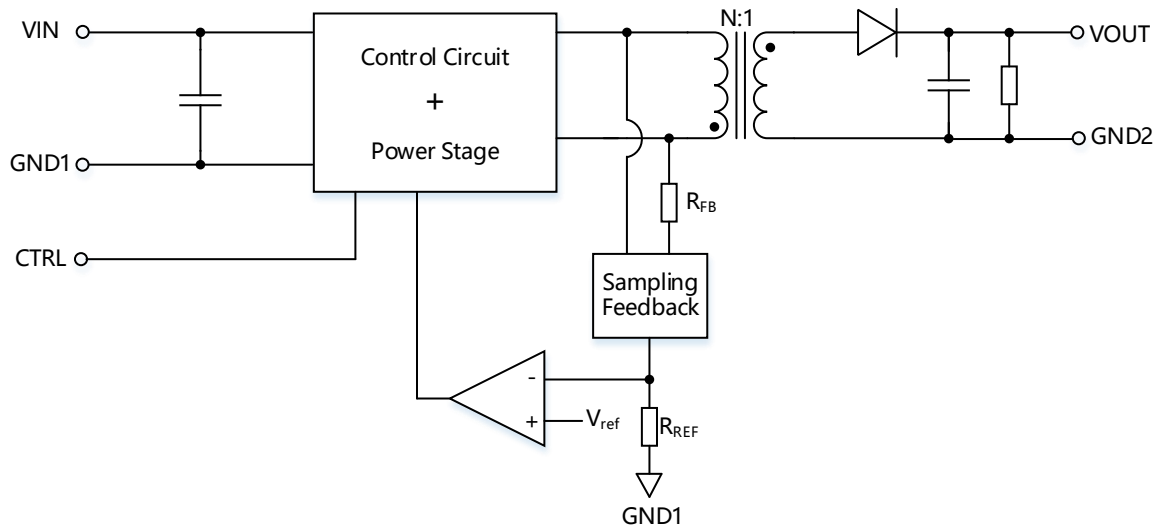


Fig. 1.1 Functional Block Diagram

During the off-time (T_{off}), the voltage across the primary winding is $V_{IN} + N \cdot V_{OUT}$. Consequently, the voltage across resistor R_{FB} equals $N \cdot V_{OUT}$, generating a current of $N \cdot V_{OUT} / R_{FB}$. This current flows through resistor R_{REF} , producing a voltage drop of $(N \cdot V_{OUT} / R_{FB}) \cdot R_{REF}$. This voltage is compared against the error amplifier's internal 1V reference to generate an error signal. The signal is subsequently amplified and processed by the control circuit to drive the power MOSFET.

2. Features

- Ultra compact SIP package
- Cost-effective open-frame solution
- No-opto solution for higher reliability
- Wide 2:1 input voltage range
- Isolation test voltage: 1.5kVDC
- Short circuit protection (Auto-recovery)
- Remote ON/OFF

3. Pin Configuration and Functions

3.1. Product

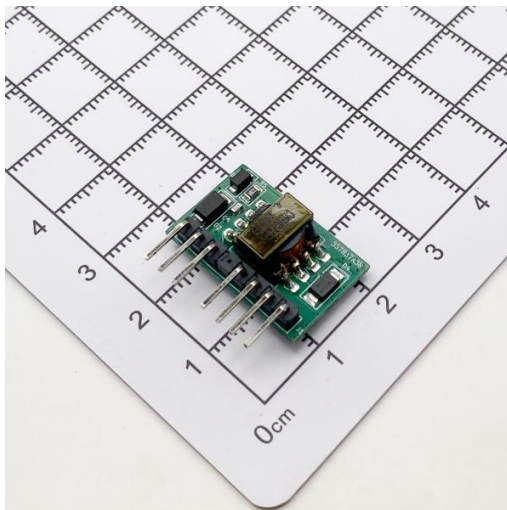


Fig. 3.1 Front side of Product

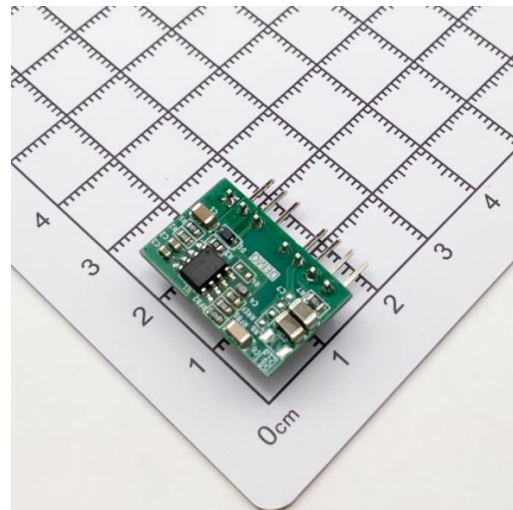


Fig. 3.2 Back side of Product

3.2. Package Outline and Functional Pin Description (Unit: mm)

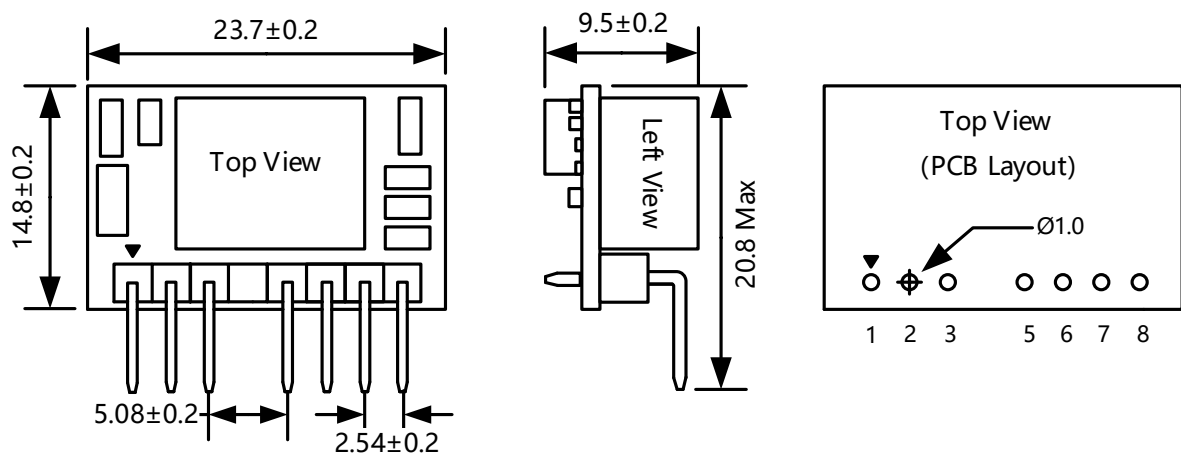


Fig. 3.3 Package Outline



Pin		Description
Name	No.	
GND1	1	Negative Power Input
VIN	2	Positive Power Input
CTRL	3	Remote Controller
NC	5, 8	No Internal Connection
VOUT	6	Positive Power Output
GND2	7	Negative Power Output

4. Electrical Characteristics

INPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Input Current	VIN=24V, 100% Load		160		mA
	VIN=24V, No Load		3		mA
UVLO		12	15.5		V
Input Filter Type	Capacitive Filter				
Ctrl	Module Enable	The CTRL pin is left floating or driven high			
	Module Disable	The CTRL pin is pulled low			
OUTPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units

Voltage accuracy	Input Voltage Range ,5%-100% Load		±3	±5	%
Line voltage regulation	VIN=(Min-Max) at full Load		±0.5	±1	%
Load voltage regulation	Nominal Input, 5%-100% Load		±0.5	±1.5	%
Transient Recovery time	25% load step change		0.5	3	ms
Transient response deviation			±3	±5	%
Temperature Coefficient	100% Load		±0.02	±0.03	%/°C
Efficiency	Nominal Input Voltage, 100% Load		79		%
Ripple & Noise	20MHz Bandwidth, Nominal Input Voltage		60		mV
Switching Frequency	100% Load, Nominal Input Voltage		300		kHz
Short Circuit protection		Continuous, Auto recovery			
GENERAL CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation voltage	Input-to-Output, tested for 1 minute, leakage current shall be less than 1mA	1500			VDC
Isolation Capacitor	Input-to-Output, 100kHz/0.1V		1000		pF
Operating temperature		-40		85	°C
Dimensions	23.7 X 14.8 X 9.5				mm

5. Typical Characteristics

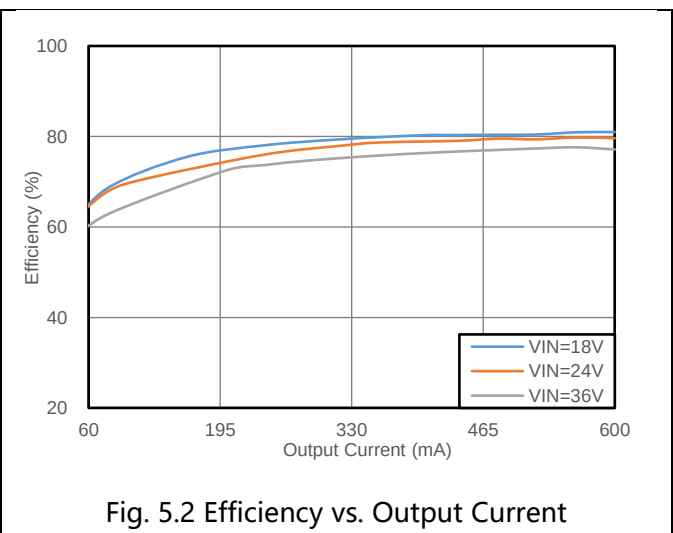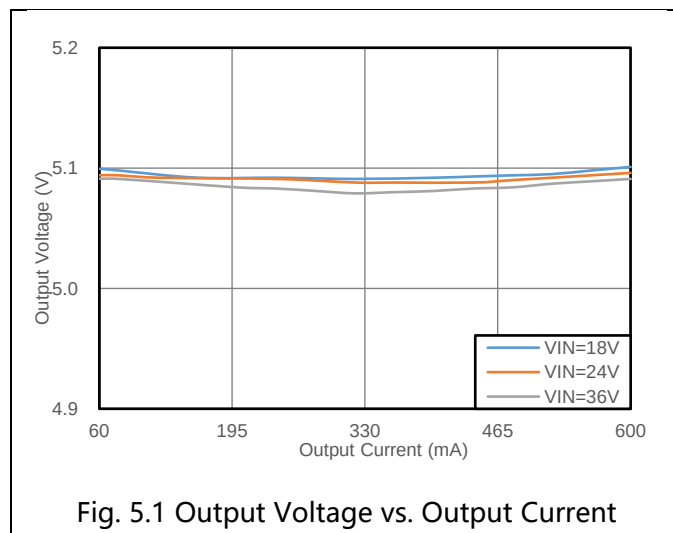

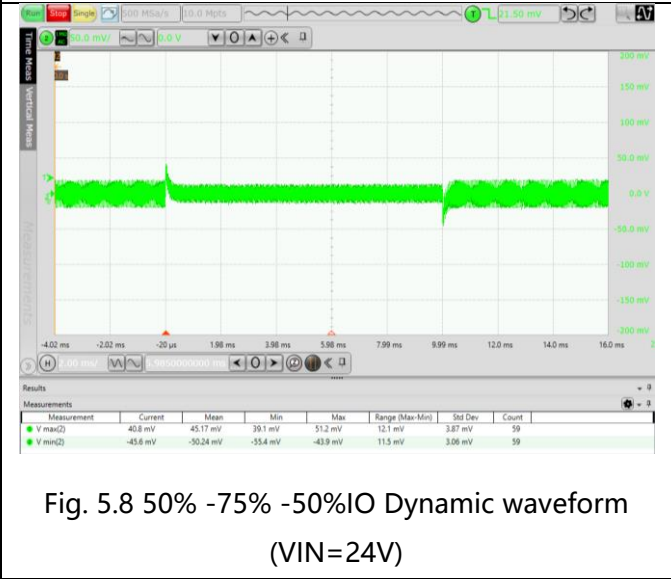
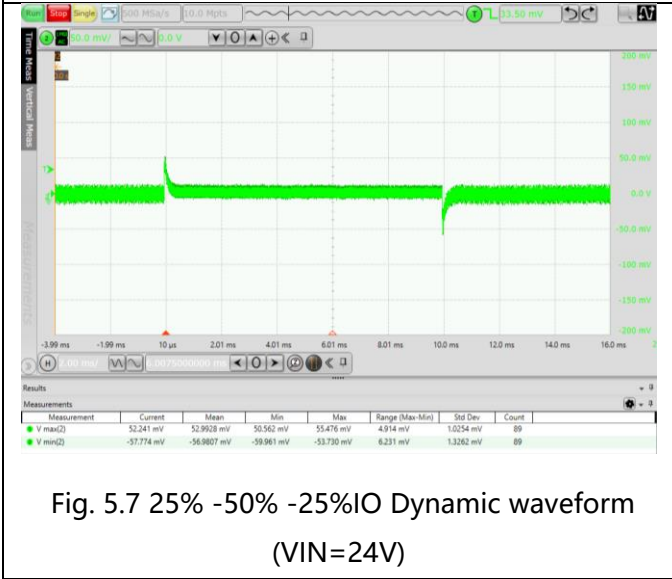
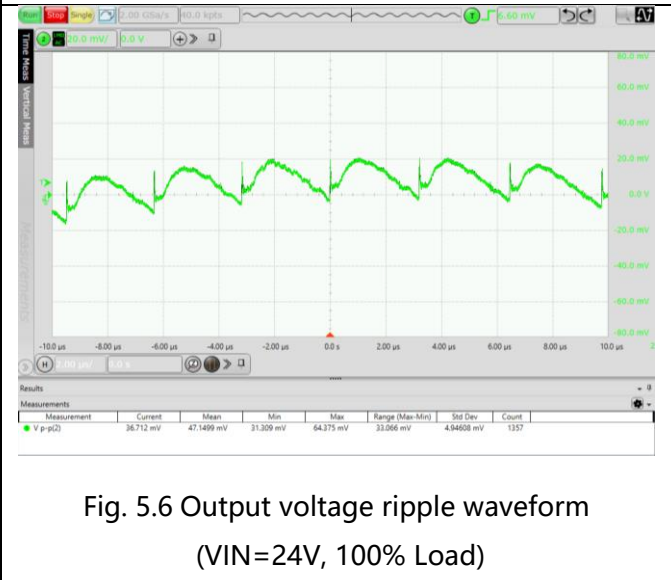
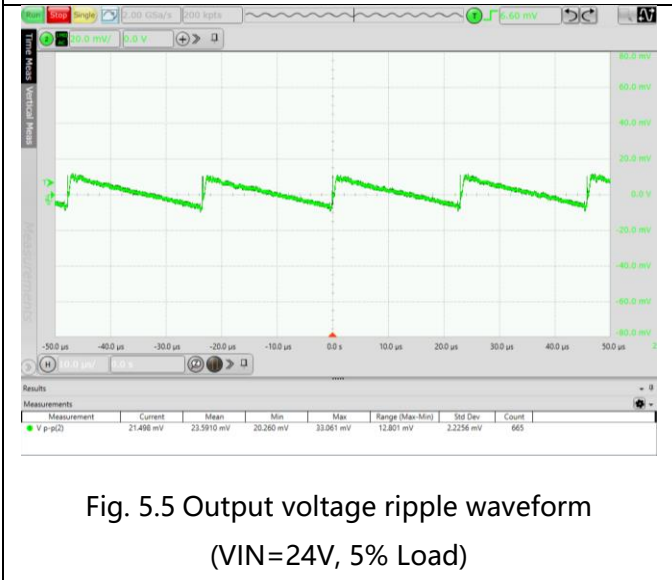
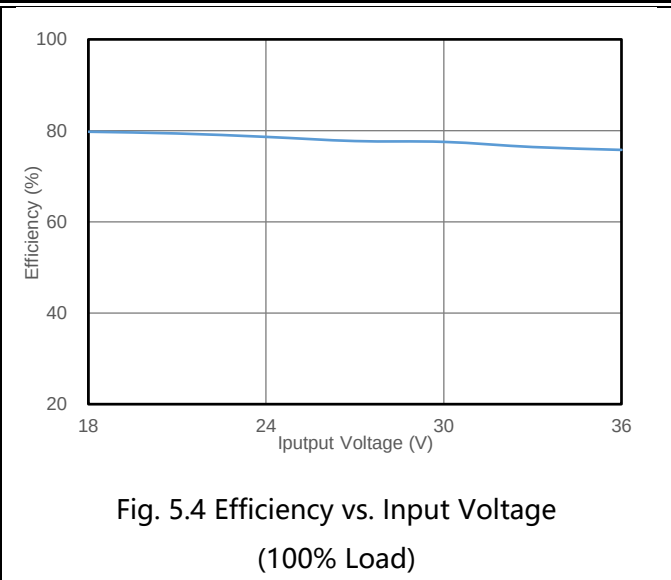
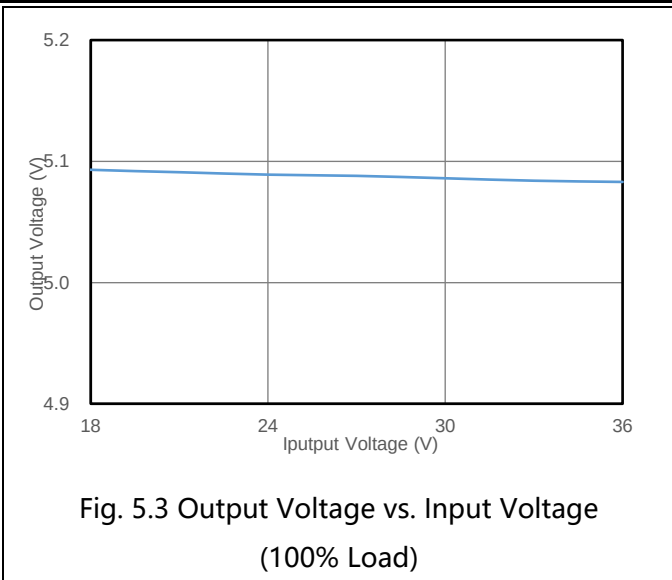




Fig. 5.9 MOS Voltage stress waveform
(VIN=36V, 100% Load)



Fig. 5.10 Secondary-side output diode stress
waveform (VIN=36V, 100% Load)